

PERC MONOCRYSTALLINE 36PM

- ◆ TT6-18PM (6 Wp) ◆ TT65-36PM (65 Wp)
- ◆ TT12-36PM (12 Wp) ◆ TT100-36PM (100 Wp)
- ◆ TT25-36PM (25 Wp) ◆ TT135-36PM (135 Wp)
- ◆ TT50-36PM (50 Wp) ◆ TT200-36PM (200 Wp)

12 Yıl
Malzeme ve İşçilik
Garantisi

25 Yıl
Performans Garantisi



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning And Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability


Wind load up to 2400 Pa, Snow load up to 5400 Pa




0~+5Wp Positive Power Tolerance



Easy Installation

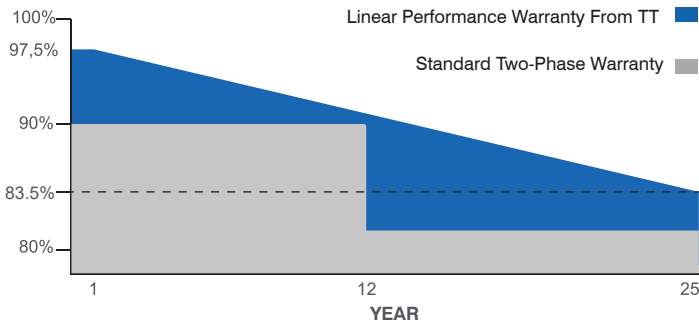

✓ 25 Year Performance Warranty ✓ 12 Year Material and Workmanship Warranty



Model Type	TT6-18PM	TT12-36PM	TT25-36PM	TT50-36PM	TT65-36PM	TT100-36PM	TT135-36PM	TT200-36PM
Peak Power (Pmax)	6 Wp	12 Wp	25 Wp	50 Wp	65 Wp	100 Wp	135 Wp	200 Wp
Maximum Power Voltage (Vmp)	10,30	20,60	20,60	20,60	20,60	20,60	20,60	20,60
Maximum Power Current (Imp)	0,61	0,61	1,22	2,43	3,25	4,86	6,50	9,71
Open Circuit Voltage (Voc)	12,02	24,05	24,05	24,05	24,05	24,05	24,05	24,05
Short Circuit Current (Isc)	0,64	0,64	1,28	2,57	3,42	5,13	6,85	10,20
Cell per Module	18(2x9)	36(4x9)	36(4x9)	36(4x9)	36(4x9)	36(4x9)	36(4x9)	36(4x9)
Cell Dimensions (mm)	79.375x20	79.375x20	79.275x39.7	158.75x39.7	158.75x53	158.75x79.375	158.75x106	158.75x158.75
Panel Dimensions (mm)	204x254x16	364x254x16	365x425x16	680x430x20	680x554x20	680x790x20	680x1025x25	680x1504x30
Weight (kg)	0,68	1,13	1,9	3,32	4,2	5,87	7,53	11,7
Voltage (v)	9V	12V	12V	12V	12V	12V	12V	12V
Nominal Operating Cell Temp.	-40 ~ +85°C							

MECHANICAL SPECIFICATIONS


Solar Glass	3,2mm Low iron, Tempered Glass		
Frame	Anodized Aluminum		
Junction Box	IP65 (6-100 Wp)		
Junction Box	IP67 (135-200 Wp)		
Cable	4mm ²		
Cable Length	65Wp 430mm	135Wp 475mm	200 Wp 1000mm

TEMPERATURE CHARACTERISTICS

Temp. Coeff. of (Isc)	0.048%/°C
Temp. Coeff. of (Voc)	-0.28%/°C
Temp. Coeff. of (Pmax)	-0.37%/°C
Nominal Working Cell Temperature (NOCT)	45°C±2°C

PHYSICAL CHARACTERISTICS

Birim: mm

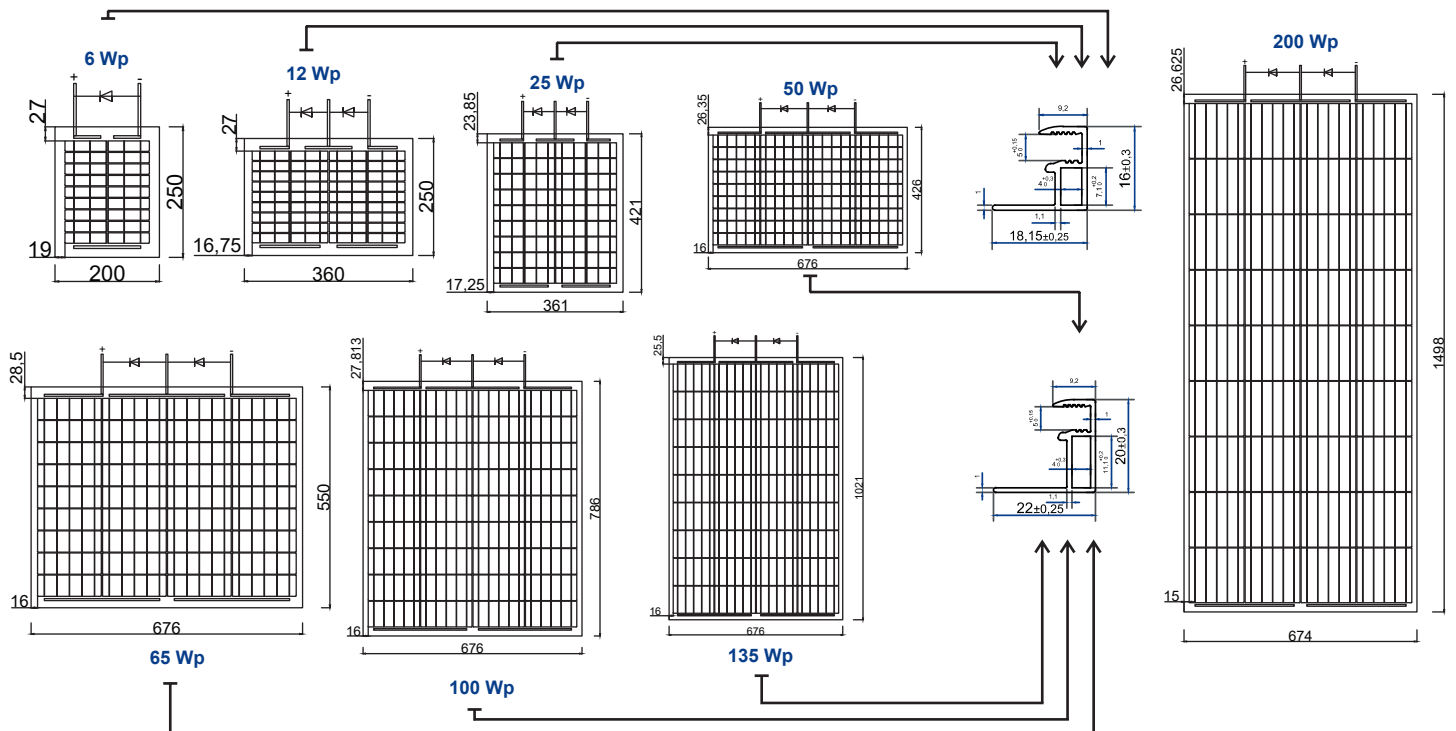

*Note: The specifications are obtained under the standard test conditions: 1000W/m² solar irradiance, 1.5 Air Mass and cell temperature of 25°C. The NOCT is obtained under the Test Conditions 800W/m² solar radiation, ambient temperature 20°C, wind speed 1m/s. Measurement uncertainty for all panels is 6%. The actual transactions will be subject to the contracts. These parameters are for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.